

TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT Process)

# 2SC2655

Power Amplifier Applications  
 Power Switching Applications


Industrial Applications

Unit: mm

- Low saturation voltage:  $V_{CE(sat)} = 0.5\text{ V (max)}$  ( $I_C = 1\text{ A}$ )
- High collector power dissipation:  $P_C = 900\text{ mW}$
- High-speed switching:  $t_{stg} = 1.0\text{ }\mu\text{s (typ.)}$
- Complementary to 2SA1020.


### Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Characteristics	Symbol	Rating	Unit
Collector-base voltage	$V_{CBO}$	50	V
Collector-emitter voltage	$V_{CEO}$	50	V
Emitter-base voltage	$V_{EBO}$	5	V
Collector current	$I_C$	2	A
Base current	$I_B$	0.5	A
Collector power dissipation	$P_C$	900	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	-55 to 150	$^\circ\text{C}$

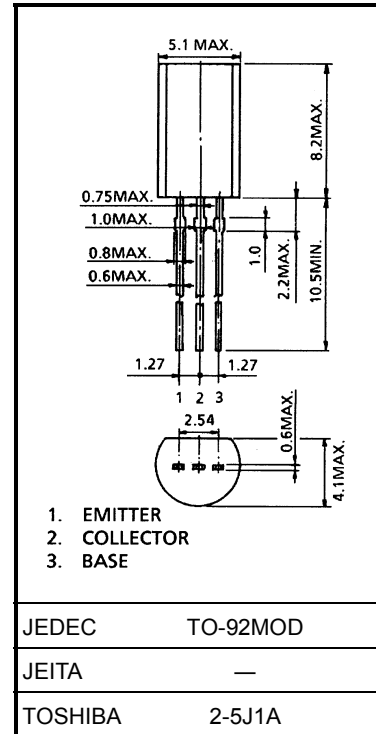

Weight: 0.36 g (typ.)

## Electrical Characteristics (Ta = 25°C)

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current		$I_{CBO}$	$V_{CB} = 50 \text{ V}, I_E = 0$	—	—	1.0	$\mu\text{A}$
Emitter cut-off current		$I_{EBO}$	$V_{EB} = 5 \text{ V}, I_C = 0$	—	—	1.0	$\mu\text{A}$
Collector-emitter breakdown voltage		$V_{(BR)CEO}$	$I_C = 10 \text{ mA}, I_B = 0$	50	—	—	V
DC current gain		$h_{FE(1)}$ (Note)	$V_{CE} = 2 \text{ V}, I_C = 0.5 \text{ A}$	70	—	240	
		$h_{FE(2)}$	$V_{CE} = 2 \text{ V}, I_C = 1.5 \text{ A}$	40	—	—	
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = 1 \text{ A}, I_B = 0.05 \text{ A}$	—	—	0.5	V
Base-emitter saturation voltage		$V_{BE(sat)}$	$I_C = 1 \text{ A}, I_B = 0.05 \text{ A}$	—	—	1.2	V
Transition frequency		$f_T$	$V_{CE} = 2 \text{ V}, I_C = 0.5 \text{ A}$	—	100	—	MHz
Collector output capacitance		$C_{ob}$	$V_{CB} = 10 \text{ V}, I_C = 0, f = 1 \text{ MHz}$	—	30	—	pF
Switching time	Turn-on time	$t_{on}$	 <p><math>I_{B1} = -I_{B2} = 0.05 \text{ A}, \text{ duty cycle } \leq 1\%</math></p>	—	0.1	—	$\mu\text{s}$
	Storage time	$t_{stg}$		—	1.0	—	
	Fall time	$t_f$		—	0.1	—	

Note:  $h_{FE(1)}$  classification O: 70 to 140, Y: 120 to 240

## Marking

