

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:


The **ASI BLY90** is Designed for Class A,B and C, 12.5 V High Band Applications up to 175 MHz.

FEATURES:

- Common Emitter
- $P_G = 5.0$ dB at 50 W/175 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	8.0 A
V_{CBO}	36 V
V_{CEO}	18 V
V_{EBO}	4.0 V
P_{DISS}	130 W @ $T_C = 25^\circ\text{C}$
T_J	-65°C to $+200^\circ\text{C}$
T_{STG}	-65°C to $+150^\circ\text{C}$
θ_{JC}	1.35 $^\circ\text{C/W}$

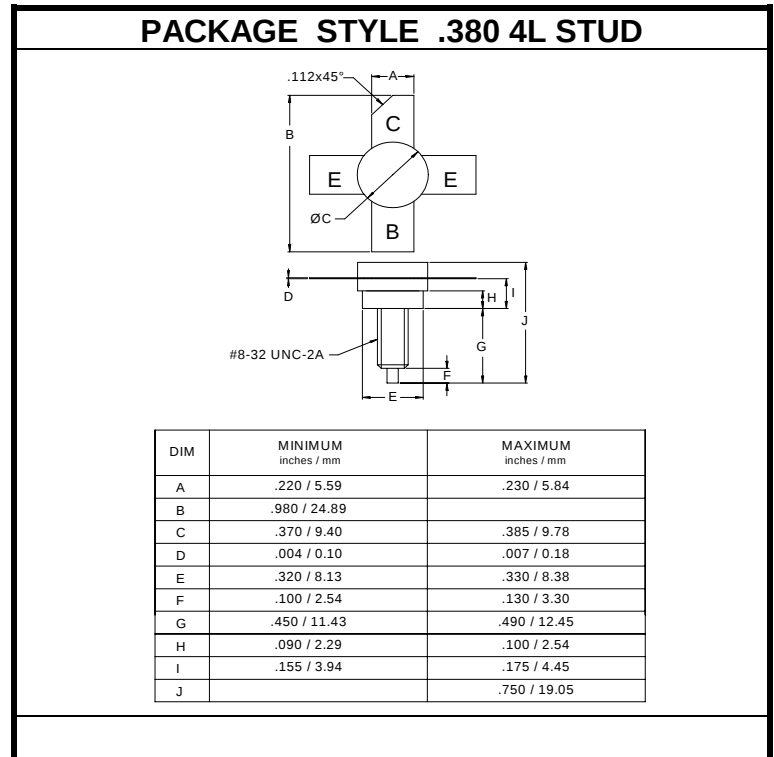

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 100$ mA	36			V
BV_{CEO}	$I_C = 100$ mA	18			
BV_{EBO}	$I_E = 25$ mA	4.0			V
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	10		200	---
C_c	$V_{CB} = 15$ V $f = 1.0$ MHz		130	160	pF
f_T	$V_{CE} = 10$ V $I_C = 6.0$ A		550		MHz
G_P η_c	$V_{CC} = 12.5$ V $P_{OUT} = 50$ W $f = 175$ MHz	5.0 75			dB %